


STANDARD FIBERGLASS DOOR FEATURES

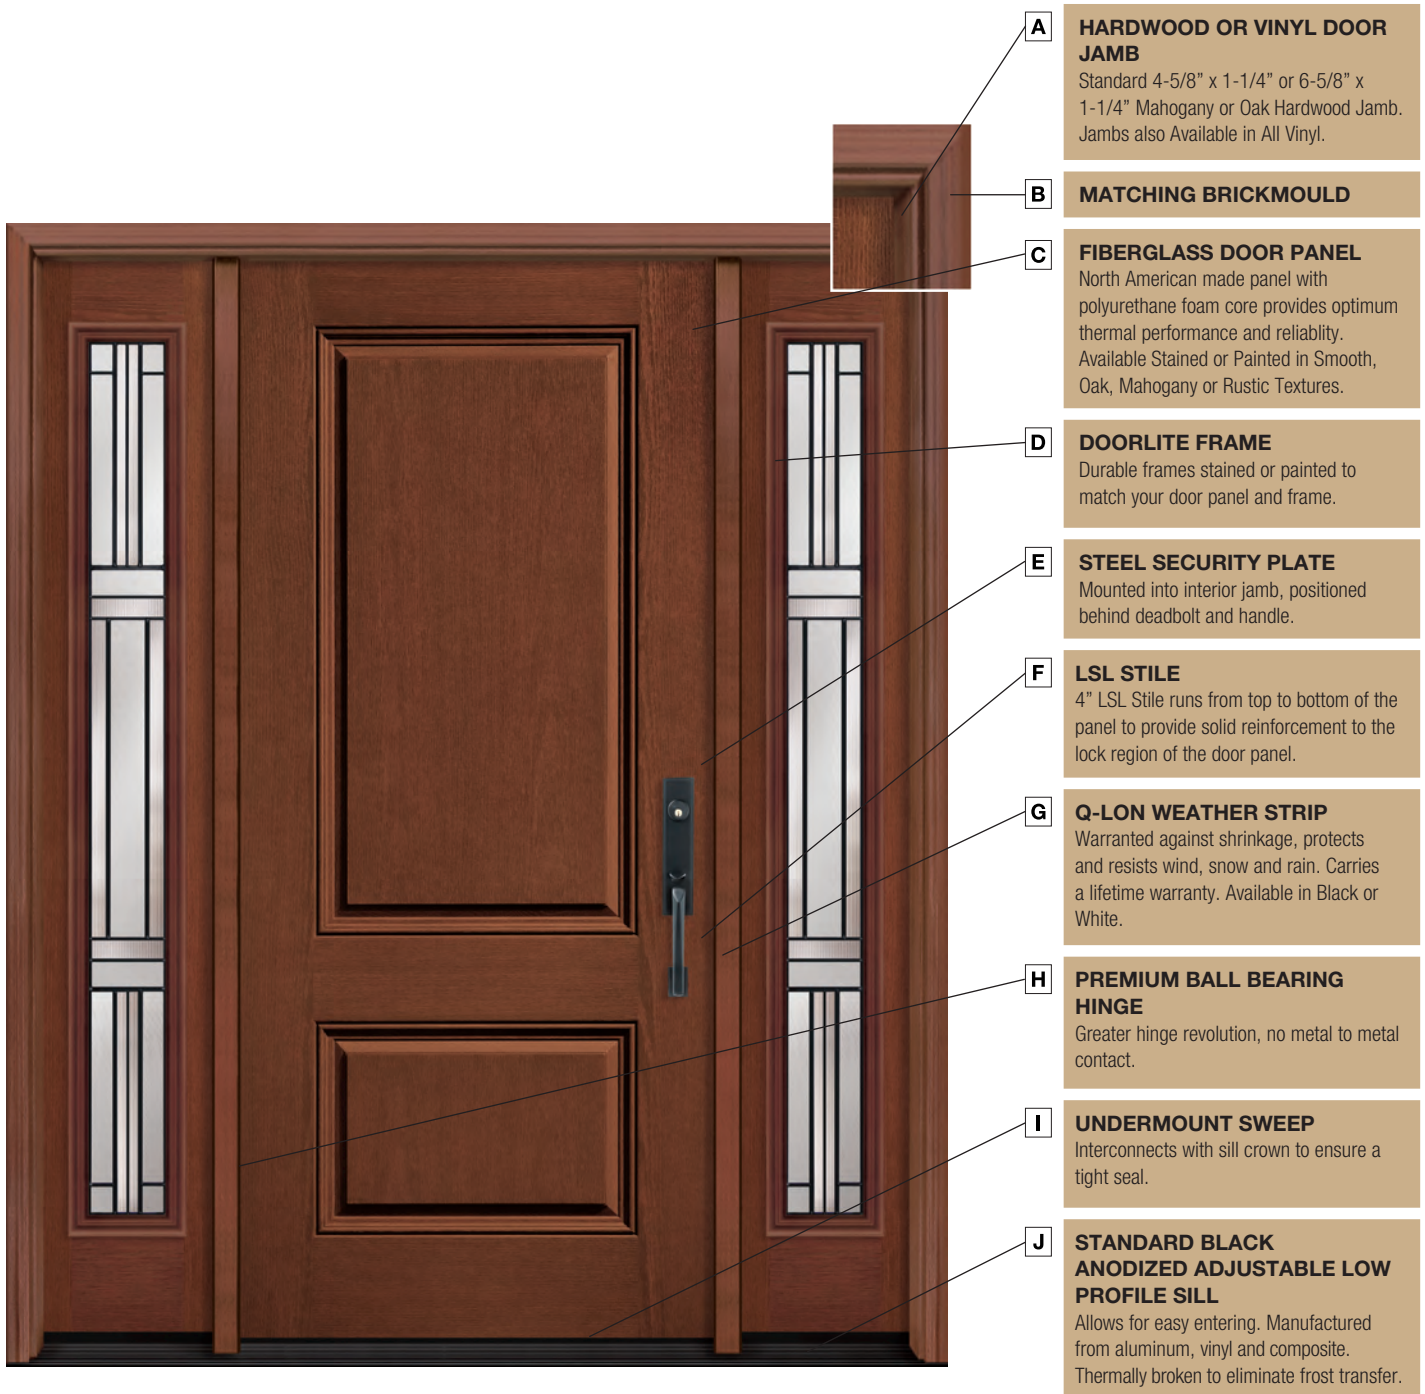

A **HARDWOOD OR VINYL DOOR JAMB**
Standard 4-5/8" x 1-1/4" or 6-5/8" x 1-1/4" Mahogany or Oak Hardwood Jamb. Jambs also Available in All Vinyl.

B **MATCHING BRICKMOULD**

C **FIBERGLASS DOOR PANEL**
North American made panel with polyurethane foam core provides optimum thermal performance and reliability. Available Stained or Painted in Smooth, Oak, Mahogany or Rustic Textures.

D **DOORLITE FRAME**
Durable frames stained or painted to match your door panel and frame.

E **STEEL SECURITY PLATE**
Mounted into interior jamb, positioned behind deadbolt and handle.

F **LSL STILE**
4" LSL Stile runs from top to bottom of the panel to provide solid reinforcement to the lock region of the door panel.

G **Q-LON WEATHER STRIP**
Warranted against shrinkage, protects and resists wind, snow and rain. Carries a lifetime warranty. Available in Black or White.

H **PREMIUM BALL BEARING HINGE**
Greater hinge revolution, no metal to metal contact.

I **UNDERMOUNT SWEEP**
Interconnects with sill crown to ensure a tight seal.

J **STANDARD BLACK ANODIZED ADJUSTABLE LOW PROFILE SILL**
Allows for easy entering. Manufactured from aluminum, vinyl and composite. Thermally broken to eliminate frost transfer.

FIBERGLASS DOOR FEATURES


- A Grain** Multiple grain options are available in fiberglass – smooth, oak, mahogany and rustic textures. Belmont’s ultra smooth finish features a unique brush stroke surface that’s ideal for painting.
- B Durability** Top and bottom rails are constructed from rot free composite material.
- C Security** Door stiles are constructed with engineered 2” laminated strand lumber (LSL) hinge, and 4” LSL latch stiles.
- D Panel Profile** Belmont features distinctive and deep high definition moulded door panels.
- E Construction** Polyurethane foam core combined with engineered wood used in stiles provide superior insulation value and structural integrity.

Belmont Smooth



Smooth Grain

Belmont Oak

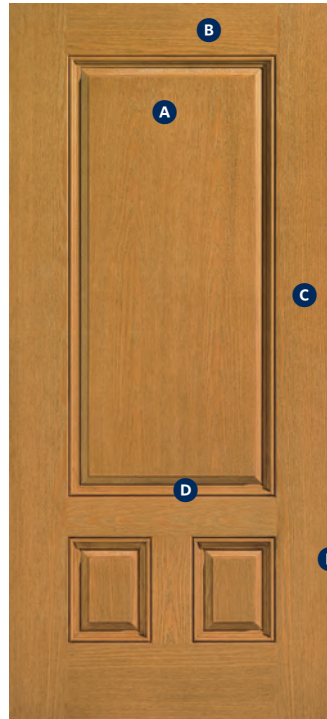

Oak Grain

Belmont Mahogany



Mahogany Grain

Belmont Rustic



Rustic Grain



Lock Side 4" Stile



Hinge Side 2" Stile

Stiles constructed from LSL material are stronger and more rigid than traditional wood stiles or laminated veneered lumber (LVL). The patented LSL manufacturing process creates a door stile that resists bowing and warping.

Extensive style, deep panel designs, selection and grain texture options make the Belmont an ideal choice for any entrance. This 100% North American product mimics the grain, texture and construction of a handcrafted hardwood door. Molded fiberglass skin, and polyurethane foam core will provide superior thermal performance, strength and durability.

Features & Benefits	Smooth	Oak	Mahogany
Authentic Grain Texture	Unique brush stroke surface	•	•
Clear Hardwood Caps on Stiles	•	•	•
2" Hinge Stile & 4" Latch Stile Construction	•	•	•
Composite Top & Bottom Rail	•	•	•
Polyurethane Foam Core	•	•	•
Deep Rich HD Panel Profiles	•	•	•
Matching Craftsman Sidelite	•	•	•
Clavos Option	•	•	•

Composite Rails

The rails are made out of rot free composite material.

Stronger Stiles

LSL is engineered wood that is free of knots or inconsistencies found in other wood products. The patented manufacturing process increases product strength while resisting bowing, twisting and shrinking.

Resource Efficient

LSL uses 99% aspen and 1% birch trees. Our LSL technology is independently certified to the Sustainable Forestry Initiative® (SFI) Standard and conforms to the ISO14001-2004 Environmental Management System Standard. LSL does not contain formaldehyde-based adhesives.

4" and 2" stile shown.



Clavos are hand forged from metal to create an authentic old world look that enhances the appearance of the rustic door.



BRK-01 with Clavos (Rustic)